



AIR CONDITIONING



REFRIGERATION



HEATING



# low profile errp

## CONDENSATE REMOVAL PUMP

Designed exclusively to fit underneath retail refrigeration cabinets the lightweight plastic ERRP (Economical Retail Refrigeration Pump) allows for the removal of defrost and contaminated water.



190L/h max. flow




21m max. rec. head (flow rate 10L/h)

### KEY FEATURES

- Lightweight & slim
- Easy to clean and carry
- Filter to catch debris
- Plug & play


### SUITABILITY

- Refrigeration units; cold store cabinets

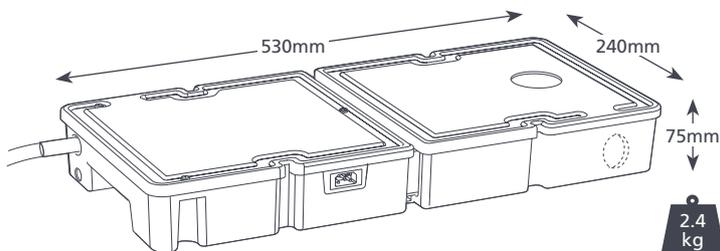

### LOW PROFILE ERRP SPECIFICATIONS

Max. flow	190L/h @ 0 head
Max. rec. head	21m
Tank capacity	3.5L
Sound level@1m	60dB(A)
Power supply	230V AC 50-60Hz 0.2A
Rated	Continuous
Class	I appliance
Max. unit output	n/a
Max. water temp	40°C / 104°F
Inlet/outlet	50mm in, 10mm out
IP Protection	IPX4
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	n/a
Self priming	n/a

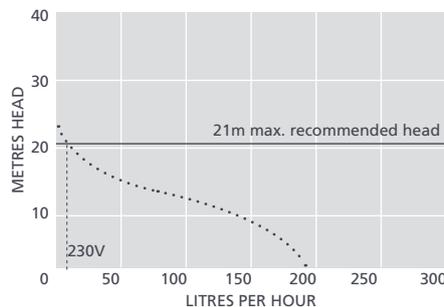

### SUGGESTED XTRA ACCESSORIES

Description	Part No.
1 Amp Fuse	FP2620
Tube To Soil Stack Adaptor	FP2038
Vinyl Tube Braided 3/8" (10mm)	AX5101
StayClean Strips	FP1248

*Xtra* For more installation accessories take a look at our Aspen Xtra range

### LOW PROFILE ERRP OPTIONS

Low Profile ERRP – top inlet	FP2597
Low Profile ERRP – side inlet	FP2805

\* Side inlet only

### IN THE BOX

Low Profile ERRP pump • 2m Plug & play power cable • 1 1/2" BSP connector (for 40mm ID waste pipe)\* • Install manual

Download manual at [aspenspumps.com](http://aspenspumps.com)



[aspenspumps.com](http://aspenspumps.com)

+44 (0)1323 848842

[sales@aspenspumps.com](mailto:sales@aspenspumps.com)

Making life easier for the installer